

Harlequin RocksureTM



Harlequin Rocksure is an extremely tough, water resistant stage surface made from polymer composite. It is extremely hard wearing, will not warp and can be drilled and screwed as conventional hardwood with carpenter tools. Harlequin Rocksure offers an attractive matt black alternative to more traditional stage surfaces such as wood, a painted “sacrificial” layer of hardboard or heavy-duty vinyl.




Installation: Harlequin Rocksure can be installed by the Harlequin technical team for new stage builds and stage refurbishments, it is also available to purchase by the sheet and can be pre-drilled if required. Expansion joints are not required.

Specification Guide


Permanent or Portable	Permanent
Sheet Dimensions	2400mm x 1200mm or 2470mm x 1230mm (Nominal)
Colour	Matt black with a frost emboss
Weight	8.4kg/m ²
Thickness	6mm
Fire Rating	Bfl-s1 (EN 13501-1)
Flammability	U.L.94 HB
Flame retardant	Electrical resistance and insulation
High Fusion Temperature	Withstands heat exceeding 200°C
Low Coefficient of Thermal Expansion	1.6mm expansion space required
Compression Strength	172-250 MN/m ²
Flexural Strength	152 MN/m ²
Warranty	5 years

Predrilled – Available upon request

Not to scale

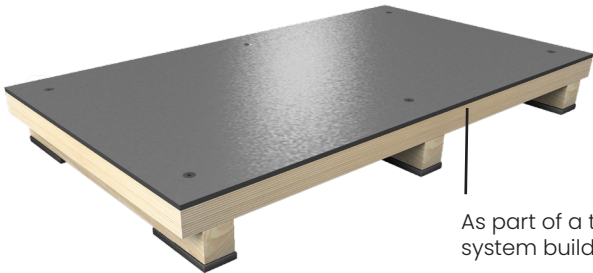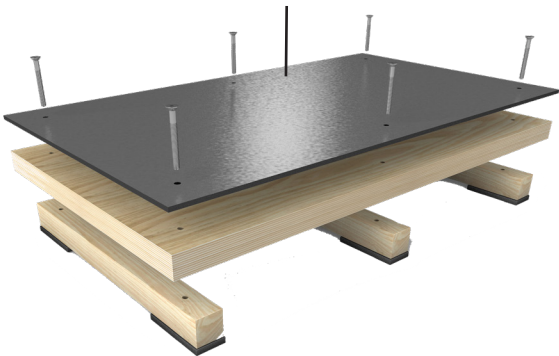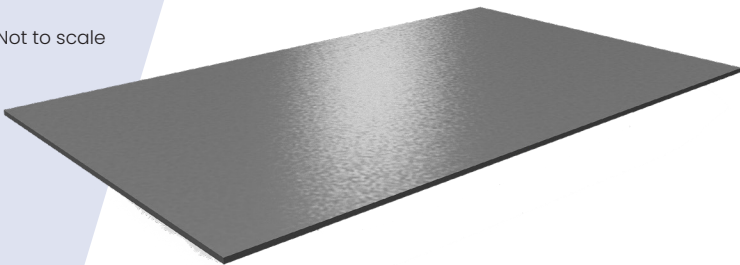

As part of a typical stage system build up.



If you would like further information or advice please contact us on +44(0) 1892 514 888 or enquiries@harlequinfloors.com

The Company reserves the right to make any variation in design or construction of the material described. Harlequin® is a registered trademark of British Harlequin plc. © Harlequin Floors 08/2026



HARLEQUIN
www.harlequinfloors.com

LONDON ♦ LUXEMBOURG ♦ BERLIN ♦ MADRID ♦ PARIS ♦ LIEGE ♦ PHILADELPHIA ♦ LOS ANGELES ♦ FORT WORTH ♦ SYDNEY ♦ HONG KONG ♦ TOKYO

*COSH Risk assessment available on request