


Harlequin

Engineered Beech

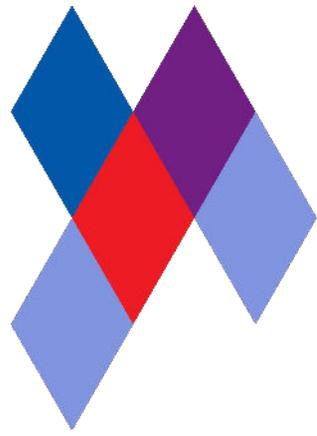

Harlequin Engineered Beech has amaretto nuances in the 3-strip beech floor which enhance the blonde hues in the wood for a harmonious appearance. To achieve this look, lighter surface wood has been mixed with reddish core wood.

Specification Guide

Construction	3-layer Engineered parquet
Wood Species	Beech
Surface Treatment	Silk lacquer
Design	3-strip
Wear Layer	Hardwood / 3.5mm
Thickness	15mm
Width	200mm
Length	2423mm
Weight per m2	7.93kg
Packaging Info	may contain start and stop boards
Colour	Changes from pink/tan tones to amber.
Detail Description	Even light colour with minor variations. Mix of lighter surface wood and reddish core of beech. Small sized knots in limited numbers allowed.

Technical Properties

Reaction to Fire EN13501-1	Dfl-s1
Over Underfloor Heating	Yes
Thermal Conductivity EN12664	0,11 W/mK
Thermal Resistance R-Value	.11 (m2K/W)
Moisure Content EN13183	7%±2%
Formaldehyde Emission EN717-1	E1
Carb2	Compliant
Slip Resistance	Please enquire



If you would like further information or advice please contact us on +44 (0) 1892 514 888 or enquiries@harlequinfloors.com

The Company reserves the right to make any variation in design or construction of the material described. Harlequin® is a registered trademark of British Harlequin plc. © Harlequin Floors 05/2023



HARLEQUIN
www.harlequinfloors.com

LONDON ♦ LUXEMBOURG ♦ BERLIN ♦ MADRID ♦ PARIS ♦ LIEGE ♦ PHILADELPHIA ♦ LOS ANGELES ♦ FORT WORTH ♦ SYDNEY ♦ HONG KONG ♦ TOKYO