


# Harlequin

## Engineered Oak

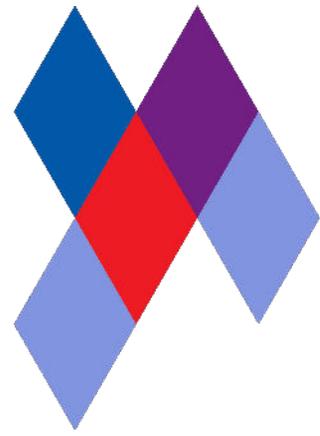

Harlequin Engineered Oak is a floor with strips selected to provide a calm appearance but still with a certain degree of variation in the grain.

### Specification Guide

Construction	3-layer parquet
Wood Species	Oak
Surface Treatment	Satin lacquer
Design	3-strip
Top Layer	Hardwood / 3.5mm
Thickness	15mm
Width	200mm
Length	2423mm
Weight per m2	7.93kg
Packaging Info	may contain start and stop boards
Colour	Some muting of colour variation to medium, straw brown
Detail Description	Even colour with minor variations. Small sized knots in limited numbers allowed.

### Technical Properties

Reaction to Fire EN13501-1	Dfl-s1
Over Underfloor Heating	Yes
Thermal Conductivity	0,11 W/mK
Thermal Resistance R-Value	.11 (m2K/W)
Moisure Content EN13183	7%±2%
Formaldehyde Emission EN717-1	E1
Carb2	Compliant
Slip Resistance	Please enquire



If you would like further information or advice please contact us on +44 (0) 1892 514 888 or [enquiries@harlequinfloors.com](mailto:enquiries@harlequinfloors.com)

The Company reserves the right to make any variation in design or construction of the material described. Harlequin ® is a registered trademark of British Harlequin plc. © Harlequin Floors 05/2023



**HARLEQUIN**  
[www.harlequinfloors.com](http://www.harlequinfloors.com)

LONDON ♦ LUXEMBOURG ♦ BERLIN ♦ MADRID ♦ PARIS ♦ LIEGE ♦ PHILADELPHIA ♦ LOS ANGELES ♦ FORT WORTH ♦ SYDNEY ♦ HONG KONG ♦ TOKYO